









# カラーステンレス/銅パーソフテン

SUS304ナスコート

表面塗装:シリコン変成ポリエステル樹脂2度塗り2度焼き付け 厚さ20 $\mu$




在庫品

板厚 mm		0.30			0.35		0.4		0.5	0.6
幅 mm		365	455	914	455	914	455	914	914	914
長さ m			50	20	50	20	50	20	20	20
重量 (kg/本)			55.0	44.0	64.0	51.0	72.5	58.0	73.0	88.0
ML01 艶消しブラック	遮熱 塗装	●	●	●	●	●	●	●	●	
NM01 艶消しブラウン	遮熱 塗装		●	●	●	●	●	●		●
MZ01 艶消しグレー	遮熱 塗装				●	●		●	●	●
MG01 艶消し緑青	遮熱 塗装		●	●	●	●	●	●		
MG01 艶消しグリーン	遮熱 塗装			●	●	●		●		
PM20 銅パーブラウン	遮熱 塗装				●	●				
PV19 キャメルブラウン	遮熱 塗装				●	●				
PZ45 メタリックグレー			●	●	●	●	●	●		
PZ01 シルバー		●	●	●	●	●	●	●	●	●
PV01 クリーム				●		●		●		
PW01 ホワイト				●		●		●		
銅パーソフテン	銅メッキ ステン ス			●				●		
				46kg/本				60kg/本		

# SUS304配管パイプ

SUS304TP-A




1本の質量(kg/本)

外径 D mm	呼び径		肉 厚 t mm 定尺4,000mm(一部6,000mmあり)										
	A	B	1.5	2.0	2.5	3.0	3.5	4.0	5.0	5.2	5.5	6.0	6.5
10.5	6	1/8	1.34	1.69									
13.8	8	1/4	1.84	2.35		3.23							
17.3	10	3/8	2.36	3.05	3.69	4.28							
21.7	15	1/2	3.02	3.92	4.80	5.60							
27.2	20	3/4	3.84	5.04	6.16	7.24							
34.0	25	1	4.84	6.36	7.84	9.28	10.6	12.0					
42.7	32	1 1/4	6.16	8.12	10.00	11.9	13.7	15.4					
48.6	40	1 1/2	7.04	9.28		13.6	15.7	17.8					
60.5	50	2	8.80	11.60		17.2	19.9	22.5	27.6		30.2		
76.3	65	2 1/2		14.80		21.9	25.4	28.8	35.5	36.8		42.0	
89.1	80	3		17.40		25.7		33.9	42.0		46.0	49.6	
101.6	90	3 1/2		19.80		29.5		38.9	48.0			57.2	
114.3	100	4		22.40		33.3		44.0	54.4			64.8	
139.8	125	5		27.50		40.8	47.6	54.0	67.2			80.0	
165.2	150	6				48.4	56.4	64.4	80.0			95.2	
216.3	200	8				63.6		84.8	105.0			126.0	136.0
267.4	250	10				79.2	92.0	105.0	131.0			156.0	169.0
318.5	300	12				94.4		125.0	156.0			187.0	202.0
355.6	350	14						140.0	175.0			209.0	
406.4	400	16						161.0	201.0			240.0	
457.2	450	18						181.0	226.0			270.0	

表記の質量はテーブル質量です。実際の商品とは異なる場合があります。重量を表示している規格は標準在庫品です。

# SUS304化粧管 (#400/HL) 4M

定尺4,000mm




● #400在庫品

■ HL在庫品

外径 D mm	肉 厚 t mm						
	0.8	1.0	1.2	1.5	2.0	3.0	4.0
5.0	●	●					
6.0	●	●					
7.0	●	●					
8.0	●	● ■					
9.0	●	●					
10.0	●	● ■					
12.0	●	● ■					
13.0	●	● ■	● ■	● ■			
13.8			● ■	● ■			
14.0	●	●					
15.0	●	●					
16.0	●	● ■	● ■	● ■	● ■		
17.3				● ■	● ■		
19.0	●	● ■	● ■	● ■	● ■		
21.7		●	● ■	● ■	● ■	● ■	
22.0	●	● ■	● ■	● ■	● ■		
25.0	●	● ■	● ■	● ■	● ■	● ■	
25.4			●	● ■	● ■		
27.2		● ■	● ■	● ■	● ■	● ■	
32.0		● ■	● ■	● ■	● ■	● ■	
34.0		●	● ■	● ■	● ■	● ■	
38.0		●	● ■	● ■	● ■	● ■	
42.7			● ■	● ■	● ■	● ■	
45.0				● ■	● ■		
48.6			● ■	● ■	● ■	● ■	
50.0		●	● ■	● ■	● ■	● ■	
60.5				● ■	● ■	● ■	
76.3				● ■	● ■	● ■	
89.1				● ■	● ■	● ■	
101.6				● ■	● ■	● ■	
114.3					● ■	● ■	
139.8					● ■	● ■	
165.2						● ■	● ■
216.3						● ■	

# SUS304化粧管 (#400/ HL) 5M/6M

定尺5,000mm ,6000mm



●庫品

外径 D mm	長さ mm	肉 厚 t mm			
		1.5	2.0	3.0	4.0
13.0	5,000	●			
	6,000	●			
16.0	5,000	●			
	6,000	●			
17.3	5,000	●	●		
	6,000	●	●		
19.0	5,000	●	●		
	6,000	●	●		
21.7	5,000	●	●	●	
	6,000	●	●	●	
22.0	5,000	●			
	6,000	●			
25.0	5,000	●	●		
	6,000	●	●		
27.2	5,000	●	●	●	
	6,000	●	●	●	
32.0	5,000	●	●	●	
	6,000	●	●	●	
34.0	5,000	●	●	●	
	6,000	●	●	●	
38.0	5,000	●	●	●	
	6,000	●	●	●	
42.7	5,000	●	●	●	
	6,000	●	●	●	
48.6	5,000	●	●	●	
	6,000	●	●	●	
50.0	5,000	●	●	●	
	6,000	●	●	●	
60.5	5,000	●	●	●	
	6,000	●	●	●	
76.3	5,000	●	●	●	
	6,000	●	●	●	
89.1	5,000				
	6,000		●	●	
101.6	5,000				
	6,000		●	●	
114.3	5,000				
	6,000		●	●	
139.8	5,000				
	6,000		●	●	
165.2	5,000				
	6,000			●	●
216.3	5,000				
	6,000			●	

# SUS304角パイプ(四角管)

SUS304 未研磨・HL研磨・#400研磨・準鏡面研磨


**D** 未研磨

**H** HL

**F** #400

**M** 準鏡面

**6** :長さ6000mmあり




寸 法 mm		肉 厚 t mm				
辺 A	定尺長さ	1.0	1.2	1.5	2.0	3.0
7	4,000	D H F				
9	3,000・4,000	D H F				
10	4,000	D H F	D H F			
12	"	D H F	D H F M			
13	"	D H F	D H F			
14	"	D H F	D H F	D H F		
16	5,000	D H F	D H F	D6 H6 F6		
19	"	D H F	D H F	D6 H6 F6	D H F	
20	"		D H F	D6 H6 F		
21	"	D H F	D H F	D H F		
22	"	D H F	D H F	D H F M		
24	"	D H F	D H F	D H F M		
25	"		D6 H6 F	D6 H6 F6		
25.4	"		D H F	D H F M		
28.6	"	D H F	D H F	D H F M		
30	"		D6 H6 F	D6 H6 F6 M	D H F	
32	"		D H F	D6 H6 F6 M	D H F	
35	"		D H F	D H F M		
38.5	"		D H F	D H F M	D H F	
40	"			D6 H6 F6	D6 H6 F6	
41	"		D H F	D6 H6 F6 M	D H F	
46	"			D H F M	D H F	
50	"			D6 H6 F6 M	D6 H6 F6 M	D6 H6 F6
60	"			D6 H6 F6	D6 H6 F6 M	D H F
75	"				D6 H6 F6 M	D6 H6 F
100	"				D6 H6 F6 M	D H F

D H F M の表示は標準在庫品です

# SUS304角パイプ(平角管)

SUS304 未研磨・HL研磨・#400研磨・準鏡面研磨

**D** 未研磨    **H** HL    **F** #400    **M** 準鏡面    **6** :長さ6000mmあり



寸 法 mm			肉 厚 t mm				
辺 A	辺 B	定尺長さ	1.0	1.2	1.5	2.0	3.0
19	10	4,000	<b>D H F</b>	<b>D H F M</b>			
22	12	5,000	<b>D H F</b>	<b>D H F</b>	<b>D H F</b>		
24	14	"	<b>D H F</b>	<b>D H F</b>	<b>D H F M</b>	<b>D H F</b>	
25	12	"		<b>D H F</b>	<b>D H F</b>		
30	20	"		<b>D H F</b>	<b>D6 H6 F6 M</b>		
	25	"		<b>D H F</b>	<b>D H F</b>		
32	16	"	<b>D H F</b>	<b>D H F</b>	<b>D6 H6 F6 M</b>		
40	18	"	<b>D H F</b>	<b>D H F</b>	<b>D H F M</b>		
	20	"		<b>D H F</b>	<b>D6 H6 F6 M</b>	<b>D H F</b>	
	25	"		<b>D H F</b>	<b>D6 H6 F6 M</b>	<b>D H F</b>	
50	20	"		<b>D H</b>	<b>D H F</b>	<b>D H F</b>	
	25	"			<b>D6 H6 F6</b>	<b>D H F</b>	
	30	"			<b>D6 H6 F6 M</b>	<b>D H F</b>	
51	26	"		<b>D H F</b>	<b>D6 H6 F6 M</b>	<b>D H F</b>	
60	25	"			<b>D H F</b>	<b>D H F</b>	
	30	"			<b>D6 H6 F6</b>	<b>D6 H6 F6</b>	
	40	"			<b>D H F</b>	<b>D H F</b>	<b>D H F</b>
61	32	"			<b>D6 H6 F6 M</b>	<b>D H F</b>	
65	18	"		<b>D H F</b>	<b>D H F M</b>		
70	25	"			<b>D H F</b>	<b>D H F</b>	
	30	"			<b>D H F</b>	<b>D H F</b>	
75	45	"			<b>D6 H6 F6</b>	<b>D6 H6 F6 M</b>	<b>D H F</b>
80	40	"			<b>D6 H6 F6</b>	<b>D6 H6 F6 M</b>	<b>D H F</b>
90	30	"			<b>D6 H6 F6</b>	<b>D H F M</b>	<b>D H F</b>
	50	"				<b>D H F</b>	<b>D H F</b>
100	40	"				<b>D H F</b>	<b>D H F</b>
	50	"				<b>D6 H6 F6 M</b>	<b>D6 H6 F6</b>
120	60	"				<b>D H F</b>	<b>D H F</b>
125	75	"				<b>D H F</b>	<b>D H F</b>
150	50	"				<b>D H F M</b>	<b>D H F</b>

**D H F M** の表示は標準在庫品です

# SUS304角パイプ(四角管)

SUS304 未研磨・HL研磨・#400研磨・準鏡面研磨


**D** 未研磨

**H** HL

**F** #400

**M** 準鏡面

**6** :長さ6000mmあり




寸 法 mm		肉 厚 t mm				
辺 A	定尺長さ	1.0	1.2	1.5	2.0	3.0
7	4,000	D H F				
9	3,000・4,000	D H F				
10	4,000	D H F	D H F			
12	"	D H F	D H F M			
13	"	D H F	D H F			
14	"	D H F	D H F	D H F		
16	5,000	D H F	D H F	D6 H6 F6		
19	"	D H F	D H F	D6 H6 F6	D H F	
20	"		D H F	D6 H6 F		
21	"	D H F	D H F	D H F		
22	"	D H F	D H F	D H F M		
24	"	D H F	D H F	D H F M		
25	"		D6 H6 F	D6 H6 F6		
25.4	"		D H F	D H F M		
28.6	"	D H F	D H F	D H F M		
30	"		D6 H6 F	D6 H6 F6 M	D H F	
32	"		D H F	D6 H6 F6 M	D H F	
35	"		D H F	D H F M		
38.5	"		D H F	D H F M	D H F	
40	"			D6 H6 F6	D6 H6 F6	
41	"		D H F	D6 H6 F6 M	D H F	
46	"			D H F M	D H F	
50	"			D6 H6 F6 M	D6 H6 F6 M	D6 H6 F6
60	"			D6 H6 F6	D6 H6 F6 M	D H F
75	"				D6 H6 F6 M	D6 H6 F
100	"				D6 H6 F6 M	D H F

D H F M の表示は標準在庫品です

# SUS304角パイプ(平角管)

SUS304 未研磨・HL研磨・#400研磨・準鏡面研磨

**D** 未研磨    **H** HL    **F** #400    **M** 準鏡面    **6** :長さ6000mmあり



寸 法 mm			肉 厚 t mm				
辺 A	辺 B	定尺長さ	1.0	1.2	1.5	2.0	3.0
19	10	4,000	<b>D H F</b>	<b>D H F M</b>			
22	12	5,000	<b>D H F</b>	<b>D H F</b>	<b>D H F</b>		
24	14	"	<b>D H F</b>	<b>D H F</b>	<b>D H F M</b>	<b>D H F</b>	
25	12	"		<b>D H F</b>	<b>D H F</b>		
30	20	"		<b>D H F</b>	<b>D6 H6 F6 M</b>		
	25	"		<b>D H F</b>	<b>D H F</b>		
32	16	"	<b>D H F</b>	<b>D H F</b>	<b>D6 H6 F6 M</b>		
40	18	"	<b>D H F</b>	<b>D H F</b>	<b>D H F M</b>		
	20	"		<b>D H F</b>	<b>D6 H6 F6 M</b>	<b>D H F</b>	
	25	"		<b>D H F</b>	<b>D6 H6 F6 M</b>	<b>D H F</b>	
50	20	"		<b>D H</b>	<b>D H F</b>	<b>D H F</b>	
	25	"			<b>D6 H6 F6</b>	<b>D H F</b>	
	30	"			<b>D6 H6 F6 M</b>	<b>D H F</b>	
51	26	"		<b>D H F</b>	<b>D6 H6 F6 M</b>	<b>D H F</b>	
60	25	"			<b>D H F</b>	<b>D H F</b>	
	30	"			<b>D6 H6 F6</b>	<b>D6 H6 F6</b>	
	40	"			<b>D H F</b>	<b>D H F</b>	<b>D H F</b>
61	32	"			<b>D6 H6 F6 M</b>	<b>D H F</b>	
65	18	"		<b>D H F</b>	<b>D H F M</b>		
70	25	"			<b>D H F</b>	<b>D H F</b>	
	30	"			<b>D H F</b>	<b>D H F</b>	
75	45	"			<b>D6 H6 F6</b>	<b>D6 H6 F6 M</b>	<b>D H F</b>
80	40	"			<b>D6 H6 F6</b>	<b>D6 H6 F6 M</b>	<b>D H F</b>
90	30	"			<b>D6 H6 F6</b>	<b>D H F M</b>	<b>D H F</b>
	50	"				<b>D H F</b>	<b>D H F</b>
100	40	"				<b>D H F</b>	<b>D H F</b>
	50	"				<b>D6 H6 F6 M</b>	<b>D6 H6 F6</b>
120	60	"				<b>D H F</b>	<b>D H F</b>
125	75	"				<b>D H F</b>	<b>D H F</b>
150	50	"				<b>D H F M</b>	<b>D H F</b>


**D H F M** の表示は標準在庫品です





# ステンレス等辺アングル(304/316/316L/430) 1

SUS304/316/316L/430(熱間圧延品)




■ 全面HL、外2面 #400研磨もあり
 ● 外2面 #400研磨もあり
 ▲ 全面HL研磨もあり
 1本の質量(Kg/本)

寸法 mm		304			316・316L		430
辺 A	厚さ t	定尺長さ mm			定尺長さ mm		定尺長さ mm
		4,000	5,000	6,000	4,000	6,000	4,000
20	3	■ 3.58			3.60		● 3.47
25	3	■ 4.52			4.56		● 4.40
30	2						● 3.62
	3	■ 5.48	6.85	■ 8.22		8.28	● 5.32
	4			10.6			
	5			13.1			
	6			15.2			
35	3			9.66			
	4	8.40		12.6			
	6			18.2			
40	2						● 4.88
	3	■ 7.40	9.25	■ 11.1		11.2	● 7.20
	4	■ 9.64		■ 14.5			
	5	▲ 11.9	14.9	■ 17.9		18.0	
	6	14.0		▲ 21.0			
45	4			16.6			
	5			20.5			
50	3	▲ 9.48		▲ 14.2			
	4	▲ 12.4	15.4	■ 18.5		18.7	
	5	▲ 15.2	19.0	■ 22.9		23.0	
	6	▲ 17.9	22.4	■ 26.9		27.0	
	8			34.7			
	9	25.8		▲ 38.6			
60	5			27.6			
	6			■ 32.6			
	9			47.2			
65	5			30.3			
	6	▲ 23.9	29.8	■ 35.8		36.1	
	8			46.4			
	9			51.8			

表記の質量はテーブル質量です。実際の商品とは異なる場合があります。重量を表示している規格は標準在庫品です。

# ステンレス等辺アングル(304/316/316L/430)2

SUS304/316/316L/430(熱間圧延品)



■ 全面HL、外2面 # 400研磨もあり


▲ 全面HL研磨もあり

1本の質量(Kg/本)

寸法 mm		304			316・316L		430
辺 A	厚さ t	定尺長さ mm			定尺長さ mm		定尺長さ mm
		4,000	5,000	6,000	4,000	6,000	4,000
65	10			57.1			
70	5			32.7			
	7			44.5			
75	5			35.0			
	6	▲ 27.7	34.6	■ 41.5		41.8	
	8			54.1			
	9	▲ 40.4		■ 60.6		60.6	
	12			78.6			
80	6			44.4			
	8			▲ 57.8			
	9			64.8			
	10			70.8			
90	6			50.2			
	8			66.0			
	9	49.2		▲ 73.8			
	10			81.0			
	12			96.0			
100	6	37.3	46.6	■ 55.9			
	8	48.8		▲ 73.2			
	9			82.2			
	10	▲ 60.4		■ 90.6		91.2	
	12			107.0			
125	9			103.0			
	12			136.0			
	15			167.0			
130	12			142.0			
150	9			125.0			
	12			165.0			
	15			203.0			

表記の質量はテーブル質量です。実際の商品とは異なる場合があります。重量を表示している規格は標準在庫品です。

# SUS304不等辺アングル



● 在庫品

寸 法 mm				1本の質量 (kg/本)	圧延品	切断品
辺 A	辺 B	厚さ t	定尺長さ			
45	30	4	6,000	13.6		●
50	30	6	"	21.4		●
65	50	6	"	31.7		●
75	50	6	"	34.4	●	
	50	7	"	39.5	●	
	50	9	"	50.0		●
	65	6	"	38.8		●
90	75	9	"	67.2		●
100	75	6	"	48.8	●	
	75	7	"	56.7		●
	75	9	"	71.4	●	
125	75	6	"	55.9	●	
	75	9	"	82.2	●	
150	90	9	"	99.0	●	
	90	12	"	130.0	●	

表記の質量はテーブル質量です。実際の商品とは異なる場合があります。重量を表示している規格は標準在庫品です。




# SUS304・430フォーミングアングル

SUS304/430

● 外2面 # 400研磨品もあり

1本の質量(Kg/本)



寸 法 mm			材 質		表面仕上
辺 A	厚さ t	定尺長さ	304	430	
15	3	4,000	2.48		CG肌
20	2	"	2.37	2.30	"
	3	"	● 3.44	● 3.24	"
25	2	"		2.92	"
	3	"	● 4.40	● 4.24	"
30	2	"	● 3.64	● 3.54	"
	3	"	● 5.32	● 5.20	"
	3	6,000	7.98		"
40	2	4,000	● 4.92	● 4.76	"
	3	"	● 7.16	● 7.04	"
	3	6,000	10.9		"
	5	"	17.1		"
50	3	"	13.6		"
	4	"	17.8		"
	5	"	21.8		"
	6	"	25.7		"
60	6	"	31.4		"
65	6	"	34.3		"
75	5	"	33.7		"
	6	"	40.0		"


表記の質量はテーブル質量です。実際の商品とは異なる場合があります。重量を表示している規格は標準在庫品です。CG肌:コイルグラインダー研磨





# ステンレスチャンネル(304/316/316L)

SUS304(熱間圧延品・溶接品)316/316L(溶接品)



● 溶接品 ▲ 6M圧延品、4M溶接品 1本の質量(Kg/本)


寸法 mm			304		316・316L	R1	R2
縦 H	横 B	肉厚 t	定尺長さ mm		定尺長さ mm		
			4,000	6,000	6,000		
40	20	3.0		10.8		4.0	2.0
50	25	3.0		13.7		4.0	2.0
80	40	3.0		● 22.3		4.5	2.0
	40	5.0	24.0	35.9	36.1	4.5	3.0
100	50	3.0		● 28.5		6.5	2.0
	50	4.0	24.8	37.2	37.4	6.5	3.0
	50	5.0	30.6	45.9	46.2	6.5	3.0
	50	6.0	36.1	54.1	54.4	6.5	4.5
120	60	6.0		● 65.4		6.5	4.0
130	65	6.0	48.0	72.0	72.6	8.5	4.0
150	75	6.0	55.6	83.4	84.0	8.5	4.0
	75	9.0	81.2	122.0	122.0	8.5	6.0
200	100	6.0	● 74.8	● 112.0		10.0	5.0
	100	8.0	● 98.4	● 148.0		10.0	6.0
	100	10.0	▲ 121.0	▲ 182.0	▲ 183.0	10.0	7.0

表記の質量はテーブル質量です。実際の商品とは異なる場合があります。重量を表示している規格は標準在庫品です。



# SUS304フラットバー 1

SUS304FB HOT/COLD/HL/#400研磨




● 在庫品

寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	
厚さA	幅 B	定尺長さ		熱間	スリット				熱間	スリット	厚さA		幅 B	定尺長さ				熱間
2	6	2,000	0.190			●			3	38	4,000	3.62	●	●	●	●	●	
	8	"	0.254			●				40	"	3.81	●	●	●	●	●	●
	9	"	0.286			●				42	"	4.00			●	●		
	10	"	0.318			●				45	"	4.28	●	●	●	●		
	10	3,000	0.477		●	●				48	"	4.56			●	●		
	10	4,000	0.636		●	●	●			50	"	4.76	●	●	●	●	●	●
	12	"	0.760			●				60	"	5.72	●	●	●	●	●	●
	15	"	0.952		●	●	●			65	"	6.20	●	●	●	●		
	20	"	1.27		●	●	●			75	"	7.12		●	●	●	●	●
	25	"	1.59		●	●	●			90	"	8.56			●			
	30	"	1.90		●	●	●			100	"	9.52		●	●	●	●	●
	32	"	2.03		●	●	●			110	"	10.5			●			
	35	"	2.22		●					120	"	11.4			●			
	38	"	2.41		●	●				125	"	11.9			●			
	40	"	2.54		●	●	●			130	"	12.4			●			
	45	"	2.86		●	●	●			140	"	13.3			●			
50	"	3.17		●	●	●		150	"	14.3			●					
3	5	3,000	0.357			●			4	9	"	1.14			●			
	6	4,000	0.568			●				10	"	1.27			●	●		
	7	"	0.668			●				11	"	1.40		●	●	●		
	8	"	0.760			●				12	"	1.52			●			
	9	"	0.856			●				13	"	1.65		●	●	●		
	10	"	0.952		●	●	●			15	"	1.90	●	●	●	●	●	
	12	"	1.14		●	●	●			16	"	2.03	●	●	●	●		
	13	"	1.24		●	●	●			17	"	2.16			●			
	15	"	1.43	●	●	●	●	●		19	"	2.41	●	●	●	●		
	16	"	1.52		●	●	●			20	"	2.54	●	●	●	●	●	
	19	"	1.81	●	●	●	●			22	"	2.79	●	●	●	●		
	20	"	1.90	●	●	●	●	●		25	"	3.17	●	●	●	●	●	
	22	"	2.09		●	●	●			30	"	3.81	●	●	●	●	●	
	25	"	2.38	●	●	●	●	●		32	"	4.08	●	●	●	●	●	
	30	"	2.86	●	●	●	●	●		35	"	4.44	●	●	●	●		
	32	"	3.04	●	●	●	●	●		38	"	4.84	●	●	●	●	●	
35	"	3.33	●	●	●	●		40	"	5.08	●	●	●	●	●			

# SUS304フラットバー 2

SUS304FB HOT/COLD/HL/#400研磨




● 在庫品

寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	
厚さA	幅 B	定尺長さ		熱間	スリット				熱間	スリット	厚さA		幅 B	定尺長さ				熱間
4	45	4,000	5.72	●	●	●	●		6	10	4,000	1.90			●	●		
	50	"	6.36	●	●	●	●	●		12	"	2.28			●	●		
	60	"	7.60	●	●	●	●	●		13	"	2.48			●	●		
	65	"	8.24	●	●	●	●	●		15	"	2.86	●	●	●	●	●	●
	75	"	9.52	●	●	●	●	●		16	"	3.04			●	●		
	90	"	11.4			●	●			18	"	3.42			●	●		
	100	"	12.7		●	●	●	●		19	"	3.62	●	●	●	●		
5	8	"	1.27			●			20	"	3.81	●	●	●	●	●	●	
	9	"	1.43			●			22	"	4.20	●	●	●	●			
	10	"	1.59			●	●		25	"	4.76	●	●	●	●	●	●	
	12	"	1.90			●	●		25	5,000	5.95	●						
	13	"	2.06			●	●		25	6,000	7.14	●						
	15	"	2.38	●	●	●	●	●	30	4,000	5.72	●	●	●	●	●	●	
	16	"	2.54			●	●		30	5,000	7.15	●						
	19	"	3.01	●	●	●	●		30	6,000	8.58	●			●			
	20	"	3.17	●	●	●	●	●	32	4,000	6.08	●	●	●	●	●	●	
	22	"	3.49	●	●	●	●		32	5,000	7.60	●						
	25	"	3.96	●	●	●	●	●	32	6,000	9.12	●						
	30	"	4.76	●	●	●	●	●	35	4,000	6.68	●	●	●	●			
	32	"	5.08	●	●	●	●	●	38	"	7.24	●	●	●	●	●	●	
	34	"	5.40			●	●		38	5,000	9.05	●						
	35	"	5.56	●	●	●	●		38	6,000	10.9	●			●			
	38	"	6.04	●	●	●	●	●	40	4,000	7.6	●	●	●	●	●	●	
	40	"	6.36	●	●	●	●	●	40	5,000	9.5	●						
	45	"	7.12	●	●				40	6,000	11.4	●			●			
	50	"	7.92	●	●	●	●	●	42	4,000	8.00			●	●			
	60	"	9.52	●	●	●	●	●	45	"	8.56	●	●	●	●	●	●	
65	"	10.3	●	●	●	●	●	48	"	9.12	●	●	●	●				
75	"	11.9	●	●	●	●	●	50	"	9.52	●	●	●	●	●	●		
90	"	14.3	●	●	●	●		50	5,000	11.9	●							
100	"	15.8	●	●	●	●	●	50	6,000	14.3	●	●		●				
130	"	20.6			●			60	4,000	11.4	●	●	●	●	●	●		
150	"	23.8			●			65	"	12.4	●	●	●	●	●	●		
6	9	"	1.71			●			65	5,000	15.4	●						

# SUS304フラットバー 3

SUS304FB HOT/COLD/HL/#400研磨




● 在庫品

寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	
厚さA	幅 B	定尺長さ		熱間	スリット				熱間	スリット	厚さA		幅 B	定尺長さ				熱間
6	65	6,000	18.5	●			●		9	22	4,000	6.28	●		●	●		
	70	4,000	13.3	●	●	●	●			25	"	7.12	●		●	●	●	
	75	"	14.3	●	●	●	●	●		25	6,000	10.7			●			
	75	5,000	17.8	●						30	4,000	8.56	●		●	●	●	
	75	6,000	21.4	●			●			30	6,000	12.8			●			
	90	4,000	17.1	●	●	●	●			32	4,000	9.12	●		●	●	●	
	100	"	19.0	●	●	●	●	●		32	5,000	11.4	●					
	100	5,000	23.8	●						32	6,000	13.7	●		●			
	100	6,000	28.6	●			●			35	4,000	10.0	●		●	●		
	110	4,000	20.9		●	●	●			38	"	10.8	●		●	●	●	
	120	"	22.8		●	●	●			38	5,000	13.6	●					
	125	"	23.8		●	●	●			38	6,000	16.3	●		●			
	130	"	24.8		●	●	●			40	4,000	11.4	●		●	●	●	
	140	"	26.6		●	●	●			40	5,000	14.2	●					
	150	"	28.6		●	●	●			40	6,000	17.1	●		●			
7	20	"	4.44	●				45	4,000	12.8	●		●					
8	10	"	2.54			●	●		50	"	14.3	●		●	●	●		
	16	"	4.08	●		●	●		50	5,000	17.8	●						
	25	"	6.36	●					50	6,000	21.4	●		●				
	30	"	7.60	●					55	4,000	15.7	●						
	32	"	8.12	●		●	●	●	60	"	17.1	●		●	●	●		
	35	"	8.88	●					65	"	18.6	●		●	●	●		
	38	"	9.64	●		●	●		65	5,000	23.2	●						
	40	"	10.2	●					65	6,000	27.8	●		●				
	45	"	11.4	●					75	4,000	21.4	●		●	●	●		
	50	"	12.7	●		●	●		75	5,000	26.8	●						
	65	"	16.5	●					75	6,000	32.1	●		●				
9	13	"	3.71	●		●	●		90	4,000	25.7	●		●	●			
	15	"	4.28	●		●	●	●	90	5,000	32.1	●						
	16	"	4.56	●		●	●		90	6,000	38.5	●						
	19	"	5.44	●		●	●		100	4,000	28.6	●		●	●	●		
	20	"	5.72	●		●	●	●	100	5,000	35.7	●						
									100	6,000	42.8	●		●				
								125	4,000	35.7	●		●	●				

# SUS304フラットバー 4

SUS304FB HOT/ COLD/HL/#400研磨




● 在庫品

寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	
厚さA	幅 B	定尺長さ		熱間	スリット				熱間	スリット	厚さA		幅 B	定尺長さ				熱間
9	125	5,000	44.6	●					12	14	4,000	5.32			●			
	125	6,000	53.5	●						15	"	5.72	●					
	150	4,000	42.8	●		●	●			16	"	6.08			●	●		
	150	5,000	53.5	●						19	"	7.24	●		●	●		
	150	6,000	64.2	●						20	"	7.60	●		●	●	●	
	200	4,000	57.2	●		●	●			25	"	9.52	●		●	●	●	
	250	"	71.2	●		●	●			25	6,000	14.3			●			
	300	"	85.6	●		●				30	4,000	11.4	●		●	●	●	
10	15	"	4.76	●		●	●	●	30	6,000	17.1			●				
	19	"	6.04	●		●	●		32	4,000	12.2	●		●	●	●		
	20	"	6.36	●		●	●	●	32	6,000	18.3			●				
	25	"	7.92	●		●	●	●	35	4,000	13.3	●		●				
	30	"	9.52	●		●	●	●	38	"	14.5	●		●	●	●		
	32	"	10.2	●		●	●	●	38	5,000	18.1	●						
	35	"	11.1	●					38	6,000	21.7	●		●				
	38	"	12.0	●		●	●	●	40	4,000	15.2	●		●	●	●		
	40	"	12.7	●		●	●	●	40	6,000	22.9			●				
	45	"	14.3	●					45	4,000	17.1	●						
	50	"	15.8	●		●	●	●	50	"	19.0	●		●	●	●		
	50	5,000	19.8	●					50	5,000	23.8	●						
	50	6,000	23.8	●		●			50	6,000	28.6	●		●				
	60	4,000	19.0	●					65	4,000	24.8	●		●	●	●		
	65	"	20.6	●		●	●	●	65	5,000	31.0	●						
	65	6,000	30.9			●			65	6,000	37.1	●		●				
	75	4,000	23.8	●		●	●		70	4,000	26.6	●						
	75	6,000	35.7			●			75	"	28.6	●		●	●	●		
	100	4,000	31.7	●		●	●	●	75	5,000	35.7	●						
	100	5,000	39.6	●					75	6,000	42.8	●		●				
	100	6,000	47.6	●		●			90	4,000	34.2	●		●	●			
	125	4,000	39.6	●		●	●		100	"	38.1	●		●	●	●		
	150	"	47.6	●		●	●		100	5,000	47.6	●						
	200	"	63.6	●		●	●		100	6,000	57.1	●		●				
250	"	79.2	●		●	●		125	4,000	47.6	●		●	●				
300	"	95.2	●					125	5,000	59.5	●							

# SUS304フラットバー 5

SUS304FB HOT/COLD/HL/#400研磨




● 在庫品

寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	
厚さA	幅B	定尺長さ		熱間	スリット				熱間	スリット	厚さA		幅B	定尺長さ				熱間
12	125	6,000	71.4	●					16	150	6,000	114.0	●					
	150	4,000	57.2	●		●	●			200	4,000	102.0	●		●	●		
	150	5,000	71.5	●						250	"	127.0	●		●	●		
	150	6,000	85.8	●						300	"	152.0	●		●			
	200	4,000	76.0	●		●	●			19	25	"	15.1	●		●	●	●
	250	"	95.2	●		●	●				30	"	18.1	●				
	300	"	114.0	●		●					32	"	19.3	●		●	●	●
16	19	"	9.64			●	●		35		"	21.1	●					
	20	"	10.2	●		●	●	●	38		"	22.9	●		●	●	●	
	25	"	12.7	●		●	●	●	40		"	24.1	●					
	30	"	15.2	●					45		"	27.1	●					
	32	"	16.2	●		●	●	●	50		"	30.1	●		●	●	●	
	35	"	17.8	●					50		5,000	37.6	●					
	38	"	19.3	●		●	●	●	50		6,000	45.2	●					
	40	"	20.3	●		●	●	●	55		4,000	33.1	●					
	45	"	22.8	●					65		"	39.2	●		●	●		
	50	"	25.4	●		●	●	●	65		5,000	48.9	●					
	50	5,000	31.7	●					65	6,000	58.7	●						
	50	6,000	38.0	●		●			75	4,000	45.2	●		●	●			
	65	4,000	33.0	●		●	●		90	"	54.4	●						
	65	5,000	41.2	●					100	"	60.4	●		●	●			
	65	6,000	49.5	●		●			100	5,000	75.5	●						
	75	4,000	38.1	●		●	●		100	6,000	90.6	●						
	75	5,000	47.6	●					125	4,000	75.2	●		●	●			
	75	6,000	57.1	●		●			150	"	90.4	●		●	●			
	90	4,000	45.6	●					200	"	120.0	●		●	●			
	100	"	50.8	●		●	●		250	"	151.0	●		●	●			
	100	5,000	63.5	●					300	"	181.0	●		●				
	100	6,000	76.2	●		●			20	70	"	44.4	●					
	125	4,000	63.6	●		●	●			22	25	"	17.4	●				
125	5,000	79.5	●					30			"	20.9	●					
125	6,000	95.4	●					32			"	22.3	●		●			
150	4,000	76.0	●		●	●		35			"	24.4	●					
150	5,000	95.0	●					38			"	26.5	●		●			

# SUS304フラットバー 6

SUS304FB HOT/COLD/HL/#400研磨




● 在庫品

寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400
厚さA	幅 B	定尺長さ		熱間	スリット				熱間	スリット	厚さA		幅 B	定尺長さ			
22	40	4,000	27.9	●					30	250	4,000	238.0	●				
	45	"	31.4	●						300	"	286.0	●				
	50	"	34.9	●		●			35	50	"	55.60	●		●		
	65	"	45.2	●		●				65	"	72.00	●		●		
	75	"	52.4	●		●				75	"	83.20	●		●		
	90	"	62.8	●						100	"	111.0	●		●		
	100	"	69.6	●		●				125	"	139.0	●				
	125	"	87.2	●					150	"	166.0	●					
	150	"	105.0	●					40	50	"	63.60	●				
	200	"	140.0	●						65	"	82.40	●				
	250	"	174.0	●						75	"	95.20	●				
	300	"	209.0	●						100	"	127.0	●				
								125		"	158.0	●					
25	32	"	25.4	●		●			50	150	"	190.0	●				
	38	"	30.1	●		●				65	"	103.0	●				
	40	"	31.7	●						75	"	119.0	●				
	45	"	35.7	●						100	"	158.0	●				
	50	"	39.6	●		●				125	"	198.0	●				
	60	"	47.6	●					150	"	238.0	●					
	65	"	51.6	●		●			60	75	"	143.0	●				
	75	"	59.6	●		●				100	"	190.0	●				
	100	"	79.2	●		●				125	"	238.0	●				
	125	"	99.2	●		●				150	"	286.0	●				
	150	"	119.0	●		●			65	75	"	155.0	●				
	200	"	158.0	●		●			70	100	"	222.0	●				
250	"	198.0	●					125		"	278.0	●					
300	"	238.0	●					150		"	333.0	●					
30	50	"	47.6	●		●			80	100	"	254.0	●				
	55	"	52.4	●		●				125	"	317.0	●				
	65	"	62.0	●		●				150	"	381.0	●				
	75	"	71.2	●		●			90	125	"	357.0	●				
	100	"	95.2	●		●				150	"	428.0	●				
	125	"	119.0	●					100	125	"	396.0	●				
	150	"	143.0	●						150	"	476.0	●				
	200	"	190.0	●													

# SUS316,316Lフラットバー

SUS316・316L FB HOT




寸法 mm			1本の質量 (kg/本)	寸法 mm			1本の質量 (kg/本)
厚さ A	幅 B	定尺長さ		厚さ A	幅 B	定尺長さ	
3	20	4,000	1.92	9	90	4,000	25.8
	25	"	2.39		100	"	28.7
	30	"	2.87	10	50	"	16.0
	32	"	3.06		100	"	31.9
	38	"	3.64	12	25	"	9.6
	40	"	3.83		32	"	12.2
	50	"	4.80		38	"	14.6
4	25	"	3.19		50	"	19.2
	30	"	3.83		65	"	24.9
	40	"	5.12	75	"	28.7	
	50	"	6.40	100	"	38.3	
5	20	"	3.19	16	25	"	12.8
	25	"	3.99		32	"	16.4
	30	"	4.80		38	"	19.4
	32	"	5.12		50	"	25.5
	38	"	6.08		65	"	33.2
	40	"	6.40		75	"	38.3
	50	"	8.00		100	"	51.2
6	25	"	4.80	19	50	"	30.3
	30	"	5.76		65	"	39.4
	32	"	6.12		75	"	45.6
	38	"	7.28		100	"	60.8
	40	"	7.68				
	50	"	9.56				
	65	"	12.4				
	75	"	14.4				
	100	"	19.2				
9	25	"	7.2				
	30	"	8.6				
	32	"	9.2				
	38	"	10.9				
	50	"	14.4				
	65	"	18.7				
	75	"	21.6				

表記の質量はテーブル質量です。実際の商品とは異なる場合があります。重量を表示している規格は標準在庫品です。

# SUS303フラットバー

SUS303 FB HOT




寸法 mm			1本の質量 (kg/本)	寸法 mm			1本の質量 (kg/本)
厚さ A	幅 B	定尺長さ		厚さ A	幅 B	定尺長さ	
6	25	4,000	4.76	19	40	4,000	24.1
	30	"	5.72		50	"	30.1
	40	"	7.60		65	"	39.2
	50	"	9.52		75	"	45.2
	65	"	12.4		100	"	60.4
	75	"	14.3		150	"	90.4
	100	"	19.0		200	"	120.0
9	25	"	7.12	22	25	"	17.4
	30	"	8.56		30	"	20.9
	40	"	11.4		40	"	27.9
	50	"	14.3		50	"	34.9
	65	"	18.6		65	"	45.2
	75	"	21.4		75	"	52.4
	100	"	28.6		100	"	69.6
12	25	"	9.52	25	150	"	105.0
	30	"	11.4		200	"	140.0
	40	"	15.2		30	50	"
	50	"	19.0	65		"	51.6
	65	"	24.8	75		"	59.6
	75	"	28.6	100		"	79.2
	100	"	38.1	150		"	119.0
	150	"	57.2	200	"	158.0	
200	"	76.0	35	50	"	55.6	
16	25	"		12.7	75	"	83.2
	30	"		15.2	100	"	111.0
	40	"		20.3	40	50	"
	50	"	25.4	75		"	95.2
	65	"	33.0	100		"	127.0
	75	"	38.1	50		75	"
	100	"	50.8		19	25	"
	150	"	76.0	30		"	18.1
200	"	102.0					

表記の質量はテーブル質量です。実際の商品とは異なる場合があります。重量を表示している規格は標準在庫品です。

# SUS304フラットバー 1

SUS304FB HOT/COLD/HL/#400研磨




● 在庫品

寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	
厚さA	幅 B	定尺長さ		熱間	スリット				熱間	スリット	厚さA		幅 B	定尺長さ				熱間
2	6	2,000	0.190			●			3	38	4,000	3.62	●	●	●	●	●	
	8	"	0.254			●				40	"	3.81	●	●	●	●	●	●
	9	"	0.286			●				42	"	4.00			●	●		
	10	"	0.318			●				45	"	4.28	●	●	●	●		
	10	3,000	0.477		●	●				48	"	4.56			●	●		
	10	4,000	0.636		●	●	●			50	"	4.76	●	●	●	●	●	●
	12	"	0.760			●				60	"	5.72	●	●	●	●	●	●
	15	"	0.952		●	●	●			65	"	6.20	●	●	●	●		
	20	"	1.27		●	●	●			75	"	7.12		●	●	●	●	●
	25	"	1.59		●	●	●			90	"	8.56			●			
	30	"	1.90		●	●	●			100	"	9.52		●	●	●	●	●
	32	"	2.03		●	●	●			110	"	10.5			●			
	35	"	2.22		●					120	"	11.4			●			
	38	"	2.41		●	●				125	"	11.9			●			
	40	"	2.54		●	●	●			130	"	12.4			●			
	45	"	2.86		●	●	●			140	"	13.3			●			
50	"	3.17		●	●	●		150	"	14.3			●					
3	5	3,000	0.357			●			4	9	"	1.14			●			
	6	4,000	0.568			●				10	"	1.27			●	●		
	7	"	0.668			●				11	"	1.40		●	●	●		
	8	"	0.760			●				12	"	1.52			●			
	9	"	0.856			●				13	"	1.65		●	●	●		
	10	"	0.952		●	●	●			15	"	1.90	●	●	●	●	●	
	12	"	1.14		●	●	●			16	"	2.03	●	●	●	●		
	13	"	1.24		●	●	●			17	"	2.16			●			
	15	"	1.43	●	●	●	●	●		19	"	2.41	●	●	●	●		
	16	"	1.52		●	●	●			20	"	2.54	●	●	●	●	●	
	19	"	1.81	●	●	●	●			22	"	2.79	●	●	●	●		
	20	"	1.90	●	●	●	●	●		25	"	3.17	●	●	●	●	●	
	22	"	2.09		●	●	●			30	"	3.81	●	●	●	●	●	
	25	"	2.38	●	●	●	●	●		32	"	4.08	●	●	●	●	●	
	30	"	2.86	●	●	●	●	●		35	"	4.44	●	●	●	●		
	32	"	3.04	●	●	●	●	●		38	"	4.84	●	●	●	●	●	
35	"	3.33	●	●	●	●		40	"	5.08	●	●	●	●	●			

# SUS304フラットバー 2

SUS304FB HOT/COLD/HL/#400研磨




● 在庫品

寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	
厚さA	幅 B	定尺長さ		熱間	スリット				熱間	スリット	厚さA		幅 B	定尺長さ				熱間
4	45	4,000	5.72	●	●	●	●		6	10	4,000	1.90			●	●		
	50	"	6.36	●	●	●	●	●		12	"	2.28			●	●		
	60	"	7.60	●	●	●	●	●		13	"	2.48			●	●		
	65	"	8.24	●	●	●	●	●		15	"	2.86	●	●	●	●	●	●
	75	"	9.52	●	●	●	●	●		16	"	3.04			●	●		
	90	"	11.4			●	●			18	"	3.42			●	●		
	100	"	12.7		●	●	●	●		19	"	3.62	●	●	●	●		
5	8	"	1.27			●			20	"	3.81	●	●	●	●	●	●	
	9	"	1.43			●			22	"	4.20	●	●	●	●			
	10	"	1.59			●	●		25	"	4.76	●	●	●	●	●	●	
	12	"	1.90			●	●		25	5,000	5.95	●						
	13	"	2.06			●	●		25	6,000	7.14	●						
	15	"	2.38	●	●	●	●	●	30	4,000	5.72	●	●	●	●	●	●	
	16	"	2.54			●	●		30	5,000	7.15	●						
	19	"	3.01	●	●	●	●		30	6,000	8.58	●			●			
	20	"	3.17	●	●	●	●	●	32	4,000	6.08	●	●	●	●	●	●	
	22	"	3.49	●	●	●	●		32	5,000	7.60	●						
	25	"	3.96	●	●	●	●	●	32	6,000	9.12	●						
	30	"	4.76	●	●	●	●	●	35	4,000	6.68	●	●	●	●			
	32	"	5.08	●	●	●	●	●	38	"	7.24	●	●	●	●	●	●	
	34	"	5.40			●	●		38	5,000	9.05	●						
	35	"	5.56	●	●	●	●		38	6,000	10.9	●			●			
	38	"	6.04	●	●	●	●	●	40	4,000	7.6	●	●	●	●	●	●	
	40	"	6.36	●	●	●	●	●	40	5,000	9.5	●						
	45	"	7.12	●	●				40	6,000	11.4	●			●			
	50	"	7.92	●	●	●	●	●	42	4,000	8.00			●	●			
	60	"	9.52	●	●	●	●	●	45	"	8.56	●	●	●	●	●	●	
	65	"	10.3	●	●	●	●	●	48	"	9.12	●	●	●	●			
75	"	11.9	●	●	●	●	●	50	"	9.52	●	●	●	●	●	●		
90	"	14.3	●	●	●	●		50	5,000	11.9	●							
100	"	15.8	●	●	●	●	●	50	6,000	14.3	●	●		●				
130	"	20.6			●			60	4,000	11.4	●	●	●	●	●	●		
150	"	23.8			●			65	"	12.4	●	●	●	●	●	●		
6	9	"	1.71			●			65	5,000	15.4	●						

# SUS304フラットバー 3

SUS304FB HOT/COLD/HL/#400研磨




● 在庫品

寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	
厚さA	幅 B	定尺長さ		熱間	スリット				熱間	スリット	厚さA		幅 B	定尺長さ				熱間
6	65	6,000	18.5	●			●		9	22	4,000	6.28	●		●	●		
	70	4,000	13.3	●	●	●	●			25	"	7.12	●		●	●	●	
	75	"	14.3	●	●	●	●	●		25	6,000	10.7			●			
	75	5,000	17.8	●						30	4,000	8.56	●		●	●	●	
	75	6,000	21.4	●			●			30	6,000	12.8			●			
	90	4,000	17.1	●	●	●	●			32	4,000	9.12	●		●	●	●	
	100	"	19.0	●	●	●	●	●		32	5,000	11.4	●					
	100	5,000	23.8	●						32	6,000	13.7	●		●			
	100	6,000	28.6	●			●			35	4,000	10.0	●		●	●		
	110	4,000	20.9		●	●	●			38	"	10.8	●		●	●	●	
	120	"	22.8		●	●	●			38	5,000	13.6	●					
	125	"	23.8		●	●	●			38	6,000	16.3	●		●			
	130	"	24.8		●	●	●			40	4,000	11.4	●		●	●	●	
	140	"	26.6		●	●	●			40	5,000	14.2	●					
	150	"	28.6		●	●	●			40	6,000	17.1	●		●			
7	20	"	4.44	●				45	4,000	12.8	●		●					
8	10	"	2.54			●	●		50	"	14.3	●		●	●	●		
	16	"	4.08	●		●	●		50	5,000	17.8	●						
	25	"	6.36	●					50	6,000	21.4	●		●				
	30	"	7.60	●					55	4,000	15.7	●						
	32	"	8.12	●		●	●	●	60	"	17.1	●		●	●	●		
	35	"	8.88	●					65	"	18.6	●		●	●	●		
	38	"	9.64	●		●	●		65	5,000	23.2	●						
	40	"	10.2	●					65	6,000	27.8	●		●				
	45	"	11.4	●					75	4,000	21.4	●		●	●	●		
	50	"	12.7	●		●	●		75	5,000	26.8	●						
	65	"	16.5	●					75	6,000	32.1	●		●				
9	75	"	19.0	●					90	4,000	25.7	●		●	●			
	100	"	25.4	●					90	5,000	32.1	●						
	13	"	3.71	●		●	●		90	6,000	38.5	●						
	15	"	4.28	●		●	●	●	100	4,000	28.6	●		●	●	●		
	16	"	4.56	●		●	●		100	5,000	35.7	●						
	19	"	5.44	●		●	●		100	6,000	42.8	●		●				
20	"	5.72	●		●	●	●	125	4,000	35.7	●		●	●				

# SUS304フラットバー 4

SUS304FB HOT/ COLD/HL/#400研磨




● 在庫品

寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	
厚さA	幅 B	定尺長さ		熱間	スリット				熱間	スリット	厚さA		幅 B	定尺長さ				熱間
9	125	5,000	44.6	●					12	14	4,000	5.32			●			
	125	6,000	53.5	●						15	"	5.72	●					
	150	4,000	42.8	●		●	●			16	"	6.08			●	●		
	150	5,000	53.5	●						19	"	7.24	●		●	●		
	150	6,000	64.2	●						20	"	7.60	●		●	●	●	
	200	4,000	57.2	●		●	●			25	"	9.52	●		●	●	●	
	250	"	71.2	●		●	●			25	6,000	14.3			●			
	300	"	85.6	●		●				30	4,000	11.4	●		●	●	●	
10	15	"	4.76	●		●	●	●	30	6,000	17.1			●				
	19	"	6.04	●		●	●		32	4,000	12.2	●		●	●	●		
	20	"	6.36	●		●	●	●	32	6,000	18.3			●				
	25	"	7.92	●		●	●	●	35	4,000	13.3	●		●				
	30	"	9.52	●		●	●	●	38	"	14.5	●		●	●	●		
	32	"	10.2	●		●	●	●	38	5,000	18.1	●						
	35	"	11.1	●					38	6,000	21.7	●		●				
	38	"	12.0	●		●	●	●	40	4,000	15.2	●		●	●	●		
	40	"	12.7	●		●	●	●	40	6,000	22.9			●				
	45	"	14.3	●					45	4,000	17.1	●						
	50	"	15.8	●		●	●	●	50	"	19.0	●		●	●	●		
	50	5,000	19.8	●					50	5,000	23.8	●						
	50	6,000	23.8	●		●			50	6,000	28.6	●		●				
	60	4,000	19.0	●					65	4,000	24.8	●		●	●	●		
	65	"	20.6	●		●	●	●	65	5,000	31.0	●						
	65	6,000	30.9			●			65	6,000	37.1	●		●				
	75	4,000	23.8	●		●	●		70	4,000	26.6	●						
	75	6,000	35.7			●			75	"	28.6	●		●	●	●		
	100	4,000	31.7	●		●	●	●	75	5,000	35.7	●						
	100	5,000	39.6	●					75	6,000	42.8	●		●				
	100	6,000	47.6	●		●			90	4,000	34.2	●		●	●			
	125	4,000	39.6	●		●	●		100	"	38.1	●		●	●	●		
	150	"	47.6	●		●	●		100	5,000	47.6	●						
	200	"	63.6	●		●	●		100	6,000	57.1	●		●				
250	"	79.2	●		●	●		125	4,000	47.6	●		●	●				
300	"	95.2	●					125	5,000	59.5	●							

# SUS304フラットバー 5

SUS304FB HOT/COLD/HL/#400研磨




● 在庫品

寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	
厚さA	幅B	定尺長さ		熱間	スリット				熱間	スリット	厚さA		幅B	定尺長さ				熱間
12	125	6,000	71.4	●					16	150	6,000	114.0	●					
	150	4,000	57.2	●		●	●			200	4,000	102.0	●		●	●		
	150	5,000	71.5	●						250	"	127.0	●		●	●		
	150	6,000	85.8	●						300	"	152.0	●		●			
	200	4,000	76.0	●		●	●			19	25	"	15.1	●		●	●	●
	250	"	95.2	●		●	●				30	"	18.1	●				
	300	"	114.0	●		●					32	"	19.3	●		●	●	●
16	19	"	9.64			●	●		35		"	21.1	●					
	20	"	10.2	●		●	●	●	38		"	22.9	●		●	●	●	
	25	"	12.7	●		●	●	●	40		"	24.1	●					
	30	"	15.2	●					45		"	27.1	●					
	32	"	16.2	●		●	●	●	50		"	30.1	●		●	●	●	
	35	"	17.8	●					50		5,000	37.6	●					
	38	"	19.3	●		●	●	●	50		6,000	45.2	●					
	40	"	20.3	●		●	●	●	55		4,000	33.1	●					
	45	"	22.8	●					65		"	39.2	●		●	●		
	50	"	25.4	●		●	●	●	65		5,000	48.9	●					
	50	5,000	31.7	●					65	6,000	58.7	●						
	50	6,000	38.0	●		●			75	4,000	45.2	●		●	●			
	65	4,000	33.0	●		●	●		90	"	54.4	●						
	65	5,000	41.2	●					100	"	60.4	●		●	●			
	65	6,000	49.5	●		●			100	5,000	75.5	●						
	75	4,000	38.1	●		●	●		100	6,000	90.6	●						
	75	5,000	47.6	●					125	4,000	75.2	●		●	●			
	75	6,000	57.1	●		●			150	"	90.4	●		●	●			
	90	4,000	45.6	●					200	"	120.0	●		●	●			
	100	"	50.8	●		●	●		250	"	151.0	●		●	●			
	100	5,000	63.5	●					300	"	181.0	●		●				
	100	6,000	76.2	●		●			20	70	"	44.4	●					
	125	4,000	63.6	●		●	●			22	25	"	17.4	●				
125	5,000	79.5	●					30			"	20.9	●					
125	6,000	95.4	●					32			"	22.3	●		●			
150	4,000	76.0	●		●	●		35			"	24.4	●					
150	5,000	95.0	●					38	"		26.5	●		●				

# SUS304フラットバー 6

SUS304FB HOT/COLD/HL/#400研磨




● 在庫品

寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400	寸法 mm			1本の質量 (kg/本)	HOT		COLD	HL	#400
厚さA	幅 B	定尺長さ		熱間	スリット				熱間	スリット	厚さA		幅 B	定尺長さ			
22	40	4,000	27.9	●					30	250	4,000	238.0	●				
	45	"	31.4	●						300	"	286.0	●				
	50	"	34.9	●		●			35	50	"	55.60	●		●		
	65	"	45.2	●		●				65	"	72.00	●		●		
	75	"	52.4	●		●				75	"	83.20	●		●		
	90	"	62.8	●						100	"	111.0	●		●		
	100	"	69.6	●		●				125	"	139.0	●				
	125	"	87.2	●					150	"	166.0	●					
	150	"	105.0	●					40	50	"	63.60	●				
	200	"	140.0	●						65	"	82.40	●				
	250	"	174.0	●						75	"	95.20	●				
	300	"	209.0	●						100	"	127.0	●				
								125		"	158.0	●					
25	32	"	25.4	●		●			50	150	"	190.0	●				
	38	"	30.1	●		●				65	"	103.0	●				
	40	"	31.7	●						75	"	119.0	●				
	45	"	35.7	●						100	"	158.0	●				
	50	"	39.6	●		●				125	"	198.0	●				
	60	"	47.6	●					150	"	238.0	●					
	65	"	51.6	●		●			60	75	"	143.0	●				
	75	"	59.6	●		●				100	"	190.0	●				
	100	"	79.2	●		●				125	"	238.0	●				
	125	"	99.2	●		●				150	"	286.0	●				
	150	"	119.0	●		●			65	75	"	155.0	●				
	200	"	158.0	●		●			70	100	"	222.0	●				
250	"	198.0	●					125		"	278.0	●					
300	"	238.0	●					150		"	333.0	●					
30	50	"	47.6	●		●			80	100	"	254.0	●				
	55	"	52.4	●		●				125	"	317.0	●				
	65	"	62.0	●		●				150	"	381.0	●				
	75	"	71.2	●		●			90	125	"	357.0	●				
	100	"	95.2	●		●				150	"	428.0	●				
	125	"	119.0	●					100	125	"	396.0	●				
	150	"	143.0	●						150	"	476.0	●				
	200	"	190.0	●													

# SUS316,316Lフラットバー

SUS316・316L FB HOT




寸法 mm			1本の質量 (kg/本)	寸法 mm			1本の質量 (kg/本)
厚さ A	幅 B	定尺長さ		厚さ A	幅 B	定尺長さ	
3	20	4,000	1.92	9	90	4,000	25.8
	25	"	2.39		100	"	28.7
	30	"	2.87	10	50	"	16.0
	32	"	3.06		100	"	31.9
	38	"	3.64	12	25	"	9.6
	40	"	3.83		32	"	12.2
	50	"	4.80		38	"	14.6
4	25	"	3.19		50	"	19.2
	30	"	3.83		65	"	24.9
	40	"	5.12	75	"	28.7	
	50	"	6.40	100	"	38.3	
5	20	"	3.19	16	25	"	12.8
	25	"	3.99		32	"	16.4
	30	"	4.80		38	"	19.4
	32	"	5.12		50	"	25.5
	38	"	6.08		65	"	33.2
	40	"	6.40		75	"	38.3
	50	"	8.00		100	"	51.2
6	25	"	4.80	19	50	"	30.3
	30	"	5.76		65	"	39.4
	32	"	6.12		75	"	45.6
	38	"	7.28		100	"	60.8
	40	"	7.68				
	50	"	9.56				
	65	"	12.4				
	75	"	14.4				
	100	"	19.2				
9	25	"	7.2				
	30	"	8.6				
	32	"	9.2				
	38	"	10.9				
	50	"	14.4				
	65	"	18.7				
	75	"	21.6				

表記の質量はテーブル質量です。実際の商品とは異なる場合があります。重量を表示している規格は標準在庫品です。

# SUS303フラットバー

SUS303 FB HOT




寸法 mm			1本の質量 (kg/本)	寸法 mm			1本の質量 (kg/本)
厚さ A	幅 B	定尺長さ		厚さ A	幅 B	定尺長さ	
6	25	4,000	4.76	19	40	4,000	24.1
	30	"	5.72		50	"	30.1
	40	"	7.60		65	"	39.2
	50	"	9.52		75	"	45.2
	65	"	12.4		100	"	60.4
	75	"	14.3		150	"	90.4
	100	"	19.0		200	"	120.0
9	25	"	7.12	22	25	"	17.4
	30	"	8.56		30	"	20.9
	40	"	11.4		40	"	27.9
	50	"	14.3		50	"	34.9
	65	"	18.6		65	"	45.2
	75	"	21.4		75	"	52.4
	100	"	28.6		100	"	69.6
12	25	"	9.52	25	150	"	105.0
	30	"	11.4		200	"	140.0
	40	"	15.2		30	50	"
	50	"	19.0	65		"	51.6
	65	"	24.8	75		"	59.6
	75	"	28.6	100		"	79.2
	100	"	38.1	150		"	119.0
	150	"	57.2	200	"	158.0	
200	"	76.0	35	50	"	47.6	
16	25	"		12.7	75	"	71.2
	30	"		15.2	100	"	95.2
	40	"		20.3	150	"	143.0
	50	"	25.4	200	"	190.0	
	65	"	33.0	40	50	"	55.6
	75	"	38.1		75	"	83.2
	100	"	50.8		100	"	111.0
	150	"	76.0	50	50	"	63.6
	200	"	102.0		75	"	95.2
19	25	"	15.1	50	100	"	127.0
	30	"	18.1		75	"	119.0

表記の質量はテーブル質量です。実際の商品とは異なる場合があります。重量を表示している規格は標準在庫品です。

# ステンレス六角棒(冷間引抜)

SUS304/SUS303




SUS304			SUS303		
寸法 mm		1本の質量 (kg/本)	寸法 mm		1本の質量 (kg/本)
対辺 A	定尺長さ		対辺 A	定尺長さ	
5	2,000	0.344	5	2,100	0.361
6	"	0.494	6	"	0.519
7	"	0.674	7	"	0.708
8	4,000	1.76	8	4,100	1.80
9	"	2.22	9	"	2.28
10	"	2.75	10	"	2.82
11	"	3.32	11	"	3.41
12	"	3.97	12	"	4.05
13	"	4.64	13	"	4.76
14	"	5.40	14	"	5.54
17	"	7.92	17	"	8.12
19	"	9.92	19	"	10.20
21	"	12.10	21	"	12.40
22	"	13.3	23	"	14.9
23	"	14.5	24	"	16.2
24	"	15.8	26	"	19.0
26	"	18.6	27	"	20.5
27	"	20.0	29	"	23.7
29	"	23.1			
30	"	24.7			
32	"	28.1			
35	"	33.6			
36	"	35.6			
38	"	39.7			
41	"	46.0			
46	"	58.0			
50	"	68.8			

表記の質量はテーブル質量です。実際の商品とは異なる場合があります。重量を表示している規格は標準在庫品です。

# ステンレス四角棒 (303/304/316/316L)

SUS303/304/316/316L



△ 303在庫品


● 304在庫品

■ 316/316L在庫品

寸法 mm		1本の質量(kg/本)		表面			
辺 A	定尺長さ	303・304	316・316L	HOT	COLD	HL	# 400
3	2,000	0.142			●		
4	4,000	0.508			●		
5	"	0.792			●	●	
6	"	1.14			●	●	
7	"	1.56			●	●	
8	"	2.03			●	●	●
9	"	2.57			●	●	●
10	"	3.17		●	●	●	●
12	"	4.56		●	●	●	●
13	"	5.36		●	●	●	●
14	"	6.20		●	●	●	●
15	"	7.12		●	●	●	●
16	"	8.12		△ ●	●	●	●
19	"	11.4	11.5	△ ● ■	●	●	●
20	"	12.7	12.8	● ■	●	●	●
22	"	15.4	15.4	△ ● ■	●	●	
25	"	19.8	20.0	△ ● ■	●	●	●
26	"	21.4			●		
28	"	24.9		●	●	●	
30	"	28.6	28.7	△ ● ■	●	●	
32	"	32.5	32.7	△ ● ■	●	●	
35	"	38.9		△			
36	"	41.2	41.4	△ ● ■	●		
38	"	46.0	46.0	● ■	●	●	
40	"	50.8	51.2	△ ● ■	●		
42	"	56.0	56.4	● ■			
45	"	64.4	64.8	△ ● ■	●		
50	"	79.2	80.0	△ ● ■	●		
55	"	96.0		●	●		
60	"	114.0		△ ●	●		
65	"	134.0		△ ●	●		
70	"	156.0		●			
75	"	178.0		△ ●			
90	"	257.0		△ ●			
100	"	317.0		△ ●			

表記の質量はテーブル質量です。実際の商品とは異なる場合があります

# ステンレス丸棒 1



kg/m

上段 ピーリングを除く全て SUS303/304/316


下段 ピーリング

● 在庫品

直径 D mm	303 304 1mの質量 (kg/m)	磨き丸棒	酸洗	H L丸棒	ピーリング		直棒				引抜		センターレス	
		304	304	304	304	303	304		303	316	304	303	304	303
		2m/4m	4m	4m	ロング	ロング	2m	4m	2m	2m	ロング	ロング	2m	2.1m
2	0.025						●						●	
2.5	0.039						●						●	
3	0.056	●					●		●				●	●
3.5	0.076	●					●						●	
4	0.100	●					●	●	●	● <sub>0.100</sub>			●	●
4.5	0.126												●	
5	0.156	●					●	●	●	● <sub>0.157</sub>			●	●
6	0.224	●					●	●	●	● <sub>0.226</sub>			●	●
7	0.305	●					●	●	●	● <sub>0.307</sub>			●	●
8	0.399	●	●	●			●	●	●	● <sub>0.401</sub>			●	●
	0.402					●								
9	0.504	●	●	●			●	●	●	● <sub>0.508</sub>			●	●
	0.508					●								
10	0.623	●	●	●			●	●	●	● <sub>0.627</sub>			●	●
	0.627					●								
11	0.754												●	●
	0.754					●								
12	0.897		●	●			●	●		● <sub>0.902</sub>			●	●
	0.908					●								
13	1.05		●	●			●	●				●	●	●
	1.06					●	●							
14	1.22		●	●								●	●	●
	1.23					●								
15	1.40		●	●								●	●	●
	1.42					●								
16	1.59		●	●								●	●	●
	1.61					●	●							
17	1.80											●		●
	1.82					●								
18	2.02		●	●								●	●	●
	2.03					●								
19	2.25		●	●								●	●	●
	2.27					●	●							
20	2.49		●	●								●	●	●
	2.51					●	●							

表記の質量はテーブル質量です。実際の商品とは異なる場合があります。直棒316に記載の数字は重量(Kg/m)です。

# ステンレス丸棒 2




kg/m 上段 ピーリングを除く全て SUS303/304/316  
下段 ピーリング

● 在庫品

直径 D mm	303 304 1mの質量 (kg/m)	磨き丸棒	酸洗	H/L丸棒	ピーリング		直棒				引抜		センターレス		
		304	304	304	304	303	304		303	316	304	303	304	303	
		2m/4m	4m	4m	ロング	ロング	2m	4m	2m	2m	ロング	ロング	2m	2.1m	
22	3.01		●	●								●	●	●	●
	3.04				●	●									
23	3.29													●	●
	3.33				●										
24	3.59													●	●
	3.61				●										
25	3.89		●	●								●	●	●	●
	3.92				●	●									
26	4.21													●	
	4.25				●										
28	4.88		●	●								●	●	●	●
	4.93				●	●									
30	5.61		●	●								●	●	●	●
	5.65				●	●									
32	6.38											●	●	●	●
	6.43				●	●									
34	7.25				●										
35	7.63											●	●	●	●
	7.68				●	●									
36	8.13				●	●									
38	8.99											●		●	●
	9.06				●	●									
40	9.97											●	●	●	●
	10.0				●	●									
42	11.0											●			
	11.1				●	●									
44	12.1				●										
45	12.6											●		●	
	12.7				●	●									
46	13.3				●	●									
48	14.3											●			
	14.4				●	●									
50	15.6											●	●	●	
	15.6				●	●									

表記の質量はテーブル質量です。実際の商品とは異なる場合があります

# ステンレス丸棒 3



kg/m 上段 ピーリングを除く全て SUS303/304/316  
下段 ピーリング

● 在庫品

直径 D mm	303 304 1mの質量 (kg/m)	磨き 丸棒	酸 洗	H L 丸棒	ピー リ ン グ		直 棒				引 抜		セ ン タ レ ス			
					304	304	304	304	303	304	303	316	304	303	304	303
					2m/4m	4m	4m	ロング	ロング	2m	4m	2m	2m	ロング	ロング	2m
55	18.8											●				
	18.9				●	●										
60	22.4											●				
	22.5				●	●										
65	26.3											●				
	26.4				●	●										
70	30.5															
	30.6				●	●										
75	35.2				●	●										
80	40.0				●	●										
85	45.3				●	●										
90	50.7				●	●										
95	56.5				●	●										
100	62.6				●	●										
105	69.0				●											
110	75.7				●											
115	82.7				●											
120	90.1				●											
125	97.7				●											
130	106.0				●											
135	114.0				●											
140	123.0				●											
150	141.0				●											
155	152.0				●											
160	161.0				●											
170	182.0				●											
180	204.0				●											
190	227.0				●											
200	252.0				●											
210	277.0				●											
220	304.0				●											
230	332.0				●											
240	362.0				●											
250	392.0				●											

表記の質量はテーブル質量です。実際の商品とは異なる場合があります

# SUS304エルボ

SUS304ロングエルボ

酸洗品/HL品/ #600研磨品

単位mm

O.D	t	R	O.D	t	R	形状
19.0	2.0	38.1	50.0	2.0	57.2	
21.7	2.0	38.1	60.5	2.0	76.2	
25.0	2.0	38.1	76.3	2.0	95.3	
27.2	2.0	38.1	89.1	2.0	114.3	
32.0	2.0	38.1	101.6	2.0	133.4	
34.0	2.0	38.1	114.3	2.0	152.4	
38.0	2.0	47.2	139.8	3.0	190.5	
42.7	2.0	47.6	165.2	3.0	228.6	
48.6	2.0	57.2				

SUS304ネック付エルボ

酸洗品/HL品/ #600研磨品

単位mm

O.D	t	R	S	A	O.D	t	R	S	A	形状
19.0	2.0	28.6	21.4	50	42.7	2.0	31.8	28.2	60	
21.7	2.0	28.6	21.4	50	48.6	2.0	38.1	21.9	60	
25.0	2.0	28.6	21.4	50	50.0	2.0	38.1	21.9	60	
27.2	2.0	28.6	21.4	50	60.5	2.0	50.8	29.2	80	
32.0	2.0	28.6	21.4	50	76.3	2.0	63.5	16.5	80	
34.0	2.0	38.1	21.9	60	89.1	2.0	76.2	13.8	90	
38.0	2.0	38.1	21.9	60						

SUS304シャープエルボ

酸洗品/HL品/ #600研磨品

単位mm

O.D	t	R1	R2	S1	S2	A	H1	H2	P	Q	形状
27.2	2.0	26.0	5.0	74	67.8	86.4	72.8	100	0.5	0.5	
32.0	2.0	28.0	7.0	62	51.0	74.0	58.0	90	0.5	0.5	
34.0	2.0	28.0	7.0	57	44.0	68.0	51.0	85	0.5	0.5	
38.0	2.0	32.0	8.0	53	39.0	66.0	47.0	85	0.5	0.5	
42.7	2.0	35.0	10.0	45	27.3	58.7	37.3	80	0.5	0.5	

SUS304角パイプ用エルボ


HL品

単位mm

サイズ	t	R	サイズ	t	R	形状
21 x 21	1.5	38.1	60 x 60	1.5	86.2	
35 x 35	1.5	48.1	60 x 40	1.5	76.2	
38.5 x 38.5	1.5	57.2	61 x 32	1.5	76.2	
41 x 41	1.5	57.2	65 x 18	1.5	76.2	
46 x 46	1.5	57.2	75 x 45	1.5	95.3	
50 x 50	1.5	57.2	80 x 40	1.5	95.3	

# 化粧パイプ用ジョイント管

SUS304HL仕上げ

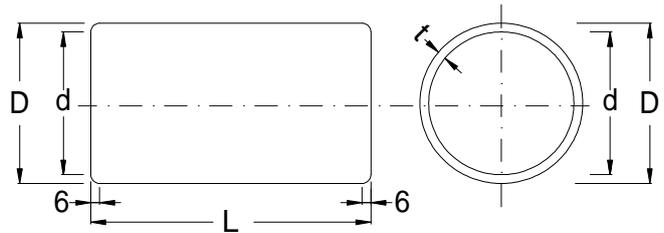

単位mm

使用パイプ		ジョイント				使用パイプ		ジョイント			
外径 D	t	D	d	t	L	外径 D	t	D	d	t	L
19.0	1.5	15.7	14.2	1.5	80	48.6	1.5	45.6	44.1	1.5	80
21.7	1.5	18.4	16.9	1.5	80		2.0	44.6	43.1	1.5	80
	2.0	17.4	15.9	1.5	80		3.0	42.6	41.1	1.5	80
22.0	1.5	18.7	17.2	1.5	80	50.0	1.5	47.0	45.5	1.5	80
25.0	1.5	22.0	20.5	1.5	80		2.0	46.0	44.5	1.5	80
	2.0	21.0	19.5	1.5	80		3.0	44.0	42.5	1.5	80
27.2	1.5	24.2	22.7	1.5	80	60.5	1.5	57.5	56.0	1.5	100
	2.0	23.2	21.7	1.5	80		2.0	56.5	55.0	1.5	100
32.0	1.5	29.0	27.5	1.5	80		3.0	54.5	53.0	2.0	100
	2.0	28.0	26.5	1.5	80	76.3	1.5	73.0	71.5	2.0	120
	3.0	26.0	24.5	1.5	80		2.0	72.0	70.5	2.0	120
34.0	1.5	31.0	29.5	1.5	80		3.0	70.0	68.5	2.0	120
	2.0	30.0	28.5	1.5	80	89.1	1.5	85.8	84.3	2.0	120
	3.0	28.0	26.5	1.5	80		2.0	84.8	83.3	2.0	120
38.0	1.5	35.0	33.5	1.5	80		3.0	82.8	81.3	2.0	120
	2.0	34.0	32.5	1.5	80	101.6	2.0	97.3	95.8	2.0	120
	3.0	32.0	30.5	1.5	80		3.0	95.3	93.8	2.0	120
42.7	1.5	39.7	38.2	1.5	80	114.3	2.0	110.0	108.5	2.0	120
	2.0	38.7	37.2	1.5	80		3.0	108.0	106.5	2.0	120
		3.0	36.7	35.2	1.5	80	139.8	3.0	133.5	132.0	2.0

# SUS304キャップ

SUS304甲丸キャップ

未研磨品/HL品/ # 600研磨品

単位mm

A	t	B	C	A	t	B	C	形状
19.0	1.5	10	4	48.6	1.5	22.5	9	
22.0	1.5	12	5.5	50.0	1.5	22.5	9	
25.0	1.5	13	6.5	60.5	2.0	26	10	
27.2	1.5	13	6.0	76.3	2.0	29	10	
32.0	1.5	16	8.0	89.1	2.0	32	12	
34.0	1.5	16	6.5	101.6	2.0	35	13	
38.0	1.5	20	9.5	114.3	2.0	38	13	
42.7	1.5	20	8.0					

SUS304浅型キャップ

未研磨品/HL品/ # 600研磨品

単位mm

A	t	B	A	t	B	形状
25.0	1.5	4	50.0	1.5	8	
27.2	1.5	4.5	60.5	2.0	10	
32.0	1.5	5	76.3	2.0	12	
34.0	1.5	5.5	89.1	2.0	15	
38.0	1.5	6	101.6	2.5	16	
42.7	1.5	7	114.3	2.5	18	
48.6	1.5	8				

SUS304半球キャップ

未研磨品/HL品/ # 600研磨品

単位mm

A	t	B	A	t	B	形状
25.0	1.5	12.5	76.3	2.0	38.1	
27.2	1.5	13.6	89.1	2.0	44.5	
32.0	1.5	16.0	101.6	2.5	50.8	
34.0	1.5	17.0	114.3	2.5	57.1	
38.0	1.5	19.0	139.8	3.0	69.9	
42.7	1.5	21.3	165.2	3.0	82.6	
48.6	1.5	24.3	216.3	3.0	108.1	
50.0	1.5	25.0				
60.5	2.0	30.2				